


Loads sustained by shaft and platform and fixing points bottom frame




Travel	Force	Load
3 m	4,2 kN	13,6 kN/m ²
6 m	5,7 kN	18,8 kN/m ²
9 m	7,2 kN	23,5 kN/m ²

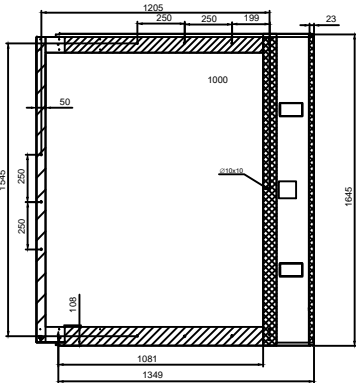


Travel	Force	Load
3 m	8,8 kN	71,1 kN/m ²
6 m	9,2 kN	74,1 kN/m ²
9 m	9,6 kN	77,2 kN/m ²

Shaft cutout sizes



Loads per fixing point, F=1250 N



Important note:

*Generic drawing to be used for quotes

*Specific drawing will be supplied upon order

Approved by builder:

European view placement:



Tender no:
Order no:
Gen. Tolerances: SS-ISO 27681-1 m

Principal drawing
A6000S - 1100*1400
Generic drawing

Date: _____ sheet: _____ Scale: A3